

"BECAUSE A PERFECT JOB
STARTS WITH PERFECT TRACING "



CHOSEN BY
15,000 PROFESSIONALS
WORLDWIDE



TESS® FAMILY

THE RIGHT CHOICE FOR EYE CARE PROFESSIONALS



TESS®

FOR EVERY NEED THERE IS A SPECIFIC TESS TRACER

Whether you need an office tracer for remote lens ordering, an accurate tracer for remote edging or a powerful tracer to integrate your lab process and improve your productivity, our TESS tracer range is the answer. Designed with a robust and patented technology, they provide exceptional performances and highly accurate results.

› EXCEED ALL YOUR EXPECTATIONS FOR REMOTE EDGING



EVERYTHING YOU NEED FROM A PERFECT TRACER

Binocular tracing of all shapes, even the most intricate and high curved.

- **Optimal rim contact** without frame deformation ensured by patented tilted stylus.
- **Tracing cycle adaptable** to frame shape and thickness, with auto-recognition of the frame material.
- **High accuracy** trace data optimized for remote ordering and remote edging.
- **Robust design. Long term stability** for low frequency of calibration.
- **OMA protocol** compatibility - Easy integration in an Essibox network.
- **200 integrated shapes** memory.
- Optional **barcode reader**.



› YOUR DAILY PARTNER FOR PRODUCTIVITY



MORE COMFORT AT A MORE INTENSIVE RATE

In addition to the performances of E-Tess tracer, L-Tess version offers:

- **User comfort optimized for natural position of the neck and back:** raised tilted touch screen.
- **Durability:** increased robustness of motors for higher production.



A TOUCH SCREEN FOR EASE OF USE




In addition to the performances of Tess tracer, E-Tess model offers even more:

- **1:1 scale shape display** to easily validate scanned shapes.
- **A large set of shape modifications:** B and ½ B dimensions, A and ½ A dimensions and scaling.
- **1,000 shapes** internal memory storage.



CHOOSE YOUR TESS® TRACER

	HIGH PRECISION	SHAPE MEMORY	CONNECTIVITY	HIGH CURVED SHAPES	SHAPE MODIFICATION	USER COMFORT	HIGH PRODUCTION
TESS	High Accuracy	200	OMA	High Curved			
E-TESS	High Accuracy	1000	OMA	High Curved	+	Touch Screen	
L-TESS	High Accuracy	1000	OMA	High Curved	+	Touch Screen	High Production

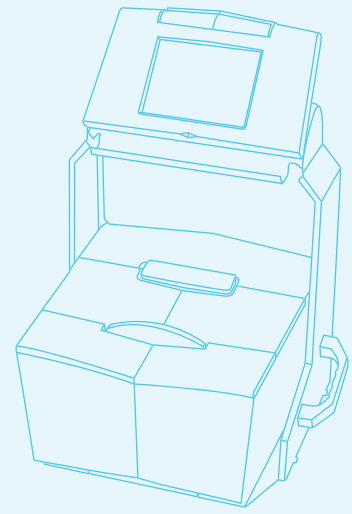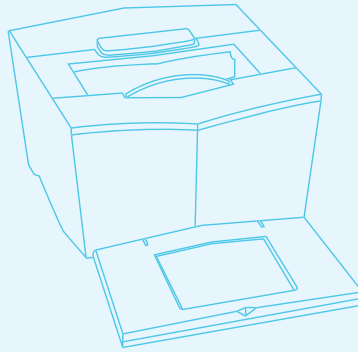

TESS® RANGE: OPTIMAL CONNECTIVITY, WHATEVER YOUR PROCESS

- Ethernet and RS232 ports, OMA/DCS Protocol



SPECIFICATIONS

	TESS	E-TESS	L-TESS
DIMENSIONS	L 11.0 x W 11.2 x H 7.1 in	L 11.0 x W 17.7 x H 7.1 in (screen open) L 11.0 x W 11.6 x H 7.1 in. (screen closed)	L 15.4 x W 12.2 x H 19.3 in
WEIGHT	17 lb.	18 lb.	25 lb.
POWER CONSUMPTION	250 W	250 W	250 W
POWER SUPPLY	240-100 V~ 60/50 Hz 5-3 A	240-100 V~ 60/50 Hz 5-3 A	240-100 V~ 60/50 Hz 5-3 A

As improvements are made, these specifications and pictures are not contractually binding and may be changed without prior notice. TESS®, E-TESS™, L-TESS™, Essibox™ are trademarks of Essilor International.



Essilor Instruments USA
 8600 W. Catalpa Avenue, Suite 703
 Chicago, IL 60656 – USA
 Phone: 855.393.4647
 Email: info@essilorinstrumentsusa.com
www.essilorinstrumentsusa.com

YOUR CONTACT